شركة صمامات الخليج للتجارة
Gulf Valve Trading Company
For Electro-Mechanical-Pipe & Fitting إلكتروميكانيكا مواسير
C.R: 2051174478 س.ت: ٢٠٥١١٧٤٤٧



COMPANY PROFILE

Approved Stockest for Electro-Mechnical such as CS & SS Pipe.
Flanges, Valves, Fittings, Coils, Fastener, Alumunium, Sheets, Bearings,
Cable, Conduit, Structural Material, Consumable & Saftey Items.

موافق لمواصفات شركة أرامكو السعودية الكهروميكا نيكية والانشائية

013 889 2163
sales@gulfvalveco.com
sales2@gulfvalveco.com
www.gulfvalveco.com
naeem@gulfvalveco.com
sales3@gulfvalveco.com
Al-Khobar North District,Prince Talal Street Cross 4, Zip code:34427, Building no. 6634, KSA
حي الخبر الشمالية، شارع الأمير طلال تقاطع: ٤، الرمز البريدي : ٣٤٤٢٧، رقم المبنى ٦٦٣٤ ، السعودية

أرامكو السعودية
saudi aramco
No. 0012952

INTRODUCTION

Gulf Valve Trading Company, established in 2022 in Al-Khobar, Kingdom of Saudi Arabia, specializes in the trading of high-quality electro-mechanical equipment, pipes, and fittings. Our mission is to provide reliable, efficient, and durable industrial solutions that support the growing demands of infrastructure and development projects throughout the Kingdom.

Our success is built on a strong foundation of integrity, commitment, and adherence to the highest standards of quality. We proudly serve a diverse clientele, including sectors such as Oil & Gas, Power & Water, Government, Private, and Public infrastructure, as well as Electro-Mechanical works.

MISSION

Our mission is to exceed client expectations by delivering outstanding customer service, superior product quality, and dependable support. We aim to be a trusted partner and reliable service provider for major project contractors across the Kingdom of Saudi Arabia.

VISION

Our vision is to become the preferred choice and a leading pioneer in mechanical and industrial supplies. We are committed to developing a skilled and dedicated workforce, maintaining flexibility and innovation in our operations, ensuring a safe working environment for our employees, and upholding a strict clean environment policy.

QUALITY POLICY

Quality is our top priority. We are committed to sourcing and supplying high-quality products that meet a wide range of budgets and specifications. Our quality policy ensures that all goods and services we provide consistently meet the highest standards.

As we move into a more competitive, customer-driven market, we remain focused on delivering exceptional service and ensuring complete customer satisfaction — values that are well-established in our operations and continuously upheld.

SERVICES

Gulf Valves Trading is committed to delivering excellent service and ensuring complete customer satisfaction. Our top priority is to fulfill this commitment by guaranteeing the on-time delivery of materials, every time.

Our core objective is to provide customers with a reliable and efficient product supply. We achieve this by leveraging our extensive nationwide delivery network to offer a comprehensive product range and the highest possible level of service — all within the shortest possible time frame.

BRANDS



HAMMER UNION

A hammer union is mechanical fitting used to quickly and securely connect pipes or hoses, especially in high-pressure systems found in the oil and gas, petrochemical, and hydraulic fracturing industries.



FIRE FIGHTING & SAFETY EQUIPMENTS











PIPES

CARBON STEEL SEAMLESS PIPES

Seamless SCH, 40, SCH 80 & SCH 160

specs : A106 Grade B - API 5L Graded B

ASTM A-53 GRADE -B



BS / GI PIPES

Welded - SCH.IO, SCH.20, SCH.40 & SCH.80

specs: ASTM A-53



STAINLESS STEEL PIPES

Welded & SMSL - SCH.IO, SCH.40 & SCH.80

specs • TP 304 / 304L &

TP 316 / 316 L



COPPER PIPES

Type L & Type K in American Standard

specs: ASTM B 88 & WWT - 79



UPVC, CPUV & PPR PIPES

PVC SCH, 40 & SCH.80 - Specs: ASTM D 1785

CPVC SCH.80 - Specs: ASTM F - 44

UPVC Class 2 - Class 3 - Class 4 - Class 5

specs: BS 3505 & 3506





FITTINGS



BUTTWELD FITTINGS - BENKAN

- Material: Carbon Steel – Black
- Wall Thickness: Sch 40 Sch 80 (above on demand)
- Size Range: ½" to 24"
- Standards: ANSI , ASME B16.3, B16.14, B16.39
- Origin: China

GROOVED FITTINGS: LBC , SHUR JOINT & NATIONAL

- Material: Ductile Iron
- Pressure rating: Min 300 – Max 750 PSI
- Size Range: 1" to 24"
- Standards: UL – Listed FM – Approved ASTM – A536
- Origin: Taiwan, India, China





MALLEABLE IRON FITTINGS: HITACHI & JIANZHI

- Material: Malleable Iron , Black and Galvanized
- Class: 150 (300 on demand)
- Size Range: ½" to 4"
- Thread: BSPT, NPT
- Standard: ANSI, ASME.B16.3, B16.14 B16.39 U/L Listed – FM approved
- Origin: Thailand & China

FORGED FITTINGS – BOTHWELL

- Material: Forged Steel
- Class: 3000 (6000, 9000 on demand)
- Size Range: 1/8" to 4"
- Thread: NPT
- Standard: ASME B16.11-2011. MSS SP-79, 83 , 95, 97 & BS 3799
- Origin: Taiwan





CARBON STEEL VALVES

Carbon Steel Valves are industrial valves made from carbon steel, a widely used material known for its strength, durability, and cost-effectiveness. These valves are used to control the flow Of liquids, gases, and slurries in various industries, especially where high pressure and temperature resistance are essential.

GATE VALVES





GATE VALVES









GATE VALVES





GATE VALVES





GALA | Regulating Systems

FIRE PROTECTION PRODUCTS



PRESSURE INDEPENDENT CONTROL VALVE (PICV)

- Body: Brass , Ductile Iron
- Type: Hook-up Kits, Threaded and Flanged PICV
- Pressure Rating: PN 16
- Size Range: ½ " to 10" , Hook-up Kit ½", ¾", 1" & 1-¼ "
- Origin: Korea

VALVES - BRONZE

- Body: Bronze
- Type: Gate, Globe, Check, Y- Strainer, Balancing &Ball Valves
- Pressure rating: PN16 ,PN20, PN25, PN32, PN40
- Size Range: ½" - 4"
- Standard: EN 1 2288, EN 5154, BS 7350
- Origin: China







GALA Regulating Systems





GALA | Regulating Systems

FIRE PROTECTION PRODUCTS



BURRIED GATE VALVES

- Body: Ductile Iron
- Type: Non-Rising Stem
- Pressure Rating: 300, 250, 200 psi
- Standards: AWWA C515/BS 5163
- Size Range: 2" to 24"
- Origin: USA

SWITCHES

- Items: Temper Switch, Water flow Detector
- Origin: USA





RUBBER EXPANSION

- Body: EPDM – Rubber Reinforced with Nylon and Stainless-Steel wire
- Type: Union (Double Sphere) Flange (Single & Double Sphere)
- Pressure rating: PN16
- Size Range: Union ½" to 4" – Flange 2" to 24"
- Standard: GB/D17241.6-1998
- Origin: China

VALVES - BRASS

- Type: Threaded
- Items: Test & Drain, Fire Department Connection, Landing, Ball valve
- Pressure rating: 300 psi
- Size Range: ½" - 4"
- Origin: USA





FLEXIBLE CONNECTORS

- Body: EPDM – Rubber Reinforced with Nylon and Stainless-Steel wire
- Type: Union (Double Sphere) Flange (Single & Double Sphere)
- Pressure rating: PN16
- Size Range: Union ½" to 4" – Flange 2" to 24"
- Standard: American & British
- Origin: USA



VALVE - DUCTILE IRON

- Body: Ductile Iron
- Type: Gate, Globe, Check, Y- Strainer, Butterfly, Balancing, Air & Control Valves
- Pressure rating: PN16 (PN20 PN25 on Demand)
- Size Range: 2" - 24" (above on demand)
- Standard: BS 5163, BS 5155, BS 7350, EN 12266, GB/25178
- Complete range epoxy coated: internally & externally
- Origin: China

WET ALARM CHECK VALVE ASSEMBLY

- Includes: Retard Chamber, Water Motor Alarm, Alarm Pressure Switch
- Body: Ductile Iron
- Pressure rating: 175 psi
- Size Range: 4" to 8"
- Origin: USA





VALVE - DUCTILE IRON

- Type: Flange & Groove
- Items: Gate, Check, Y-Strainer, Butterfly
- Pressure Rating: 300, 250, 200 psi
- Size Range: 2" to 24"
- Standard: AWWA C515, C508/BS5163
- Origin: USA

GATE VALVE ACCESSORIES

- Items: T-key, Spindles, Surface Box
- Origin: USA





HYDRANTS

- Body: Ductile Iron
- Type: Dry barrel & Wet barrel
- Pressure Rating: 250 psi
- Design Standard: FM1510/UL246/AWWA C502
- Size Range: 6"
- Origin: USA

VALVES - BRASS

- Body: Brass
- Type: Gate, Globe, Check, Ball, Foot, Pressure reducing, Float Air Valves & Y- Strainer
- Pressure rating: PN10,PN16 ,PN20, PN25
- Size Range: ½" - 4"
- Standard: EN 12288, EN 13959 EN 10226-2
- Origin: China





DISMANTELING JOINTS

- Body: Carbon Steel
- Pressure Rating: PN-16/PN-25, class 150/class 300
- Size: 2½" to 88"
- Origin: USA

POST INDICATOR

- Origin: USA



STAINLESS STEEL PIPE FITTINGS



We hold stocks of and supply a complete range of Stainless-Steel Fittings.







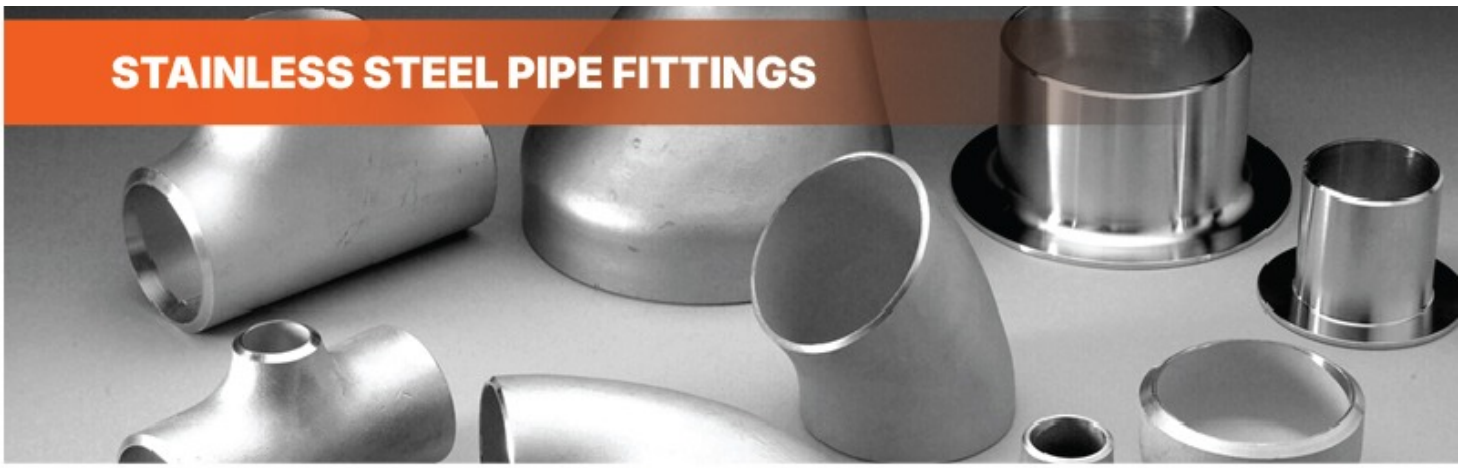

STAINLESS STEEL VALVES

We hold stocks of and supply a complete range of valves including gate, globe, check, ball, butterfly valves etc. in all varieties of stainless steel as requested.

Our valves come from major national and international manufacturers.







PIPE HANGER & SUPPORTS

TEMBO SEVEN STAR®

Pipe supports are designed to support insulated or non-insulated pipes allowing vertical adjustment and limited movement in the piping system. A wide range of pipe supports are available for various applications including, Clevis Hanger, Loop Hanger, J-Hanger, Bell Hanger, Wire Pipe Hanger, Milford Hanger, DWV Pipe Hanger...etc

Pipe fasteners are designed for support and attachment of pipe to structural members. A wide range of pipe supports are available for various applications.



HANGERS

- Material: Mild Steel , EPDM Rubber
- Type: Clevis, Sprinkler, Hanger with EPDM lining, U-Strap
- Riser Clamp, U Bolt, Rubber Support insert
- Size range: ½" to 30"
- Standard: ANSI / MSS SP-58 & SP-69
- Origin: India

ROLLERS

- Material: Mild Steel
- Type: Roller Stand, Roller Chair, Roller Hanger, Pipe Roller
- Size range: 2" to 30"
- Standard: ANSI / MSS SP-58 & SP-69
- Origin: India





THREADED ROD FASTENERS & ANCHORS

- Material: Mild Steel, Carbon Steel
- Type: Threaded Rod, Bolts, Nut, Washer, Anchors, G-Clip & beam Clamp
- Standard: ASTM , ASME, BS, DIN, BS EN ISO / JIS
- Origin: India

CHANNELS & BARS

- Material: Mild Steel
- Type: Slotted Channels, Angle Bars
- Length: 3Mtrs, 6 Mtrs
- Origin: India





TEMBO SEVEN STAR®



ANTI VIBRATION-SPRING

- Spring Hanger
- Closed Spring Mount
- Open Spring Mount

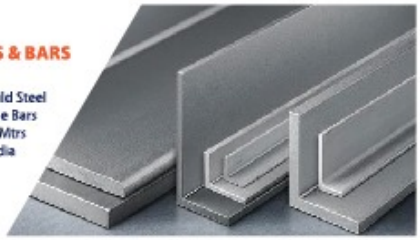ANTI VIBRATION-PADS

- Ribbed Mounting Pad
- Waffle Pads
- Crock Sandwich Pads
- Metal Sandwich Pads





EXPANSION JOINT

- Threaded
- Flanged

i - Single Sphere
ii - Double Sphere

DIELECTRIC FITTINGS

- Dielectric Union
- Dielectric Flange





ANTI VIBRATION-RUBBER

- Rubber Hanger
- Duct Mount
- Turret Mount



HVAC INSTRUMENTS & MISCELLANEOUS



GAUGES & ACCESSORIES: WIKA & GALA

- Thermometer
- Pressure Gauge
- Siphon Tube
- Cock Valves



DENSO – ANTI CORROSION

- Type: Tape, Primer, Densopol, Densyl Mastic
- Size range: 50, 80, 100, 150 mm
- Standard: ASTM D1000
- Origin: UK





TEFLON TAPE



PERMATEX



JUTE



THINNER & CLEARS



FLANGES & GACKETS



SPIRAL WOUND

- Spiral Wound
- Material: Stainless Steel 304 - 316
- Class: 150 - 300
- Size range: ½" to 24"
- Origin: KSA, India, China

ASBESTOS GASKETS

- Type: Ring & Hole
- Size range: ½" to 24"
- Thickness : 3mm
- Origin: KSA, India, China





RUBBER GASKETS

- Class: 150 PN16
- Size range: ½" to 24" (above on demand)
- Thickness: 3mm
- Origin: KSA, India, China

FLANGES – KOFCO

- Material: Forged Carbon Steel – Stainless Steel
- Class: 150 – 300 – PN 16, PN 25
- Size range: ½" to 24" (above on demand)
- Types: Welding Neck, Threaded, Slip-on, Lap joint, Blind Socket – Welding
- Standards: ANSI AWWA API & MSS
- Origin: China

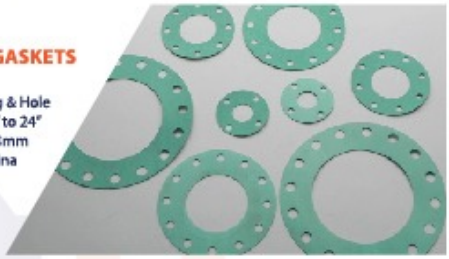



UNIVERSAL COUPLING FLANGE ADAPTOR – VICKING JOHNSONS

- Material: Ductile Iron
- Size range: 2" to 24" (above on demand)
- Standards: BS EN 1563 – BS EN 10025 – 2 Grade S275JR
- Origin: UK